



6. Connect all required circuit points
Place Alpine INE-W928R on dash
board and fix it with 2 OEM
Torx screws



7. Place facia plate to finish
installation

*This kit can be used for cars which were equipped
with the following factory radios:*

- Chorus Gen.II+
- Concert Gen.II+
- Symphony II
- Symphony II+
- RNS-E
- RNS-low (BNS 5.0)

*If the car was equipped with a 1 DIN radio like Radio Chorus II, Concert II or
Symphony II, you need to change the center console to 2 DIN.*

Your Audi partner can support you.




Installation Manual INE-W928R Kit

- Audi A3 (8P) 2004 - 09/2012

colour / part-no.:
black: 381320-83-1

Compatible with these Alpine navigation devices

INE-W928R

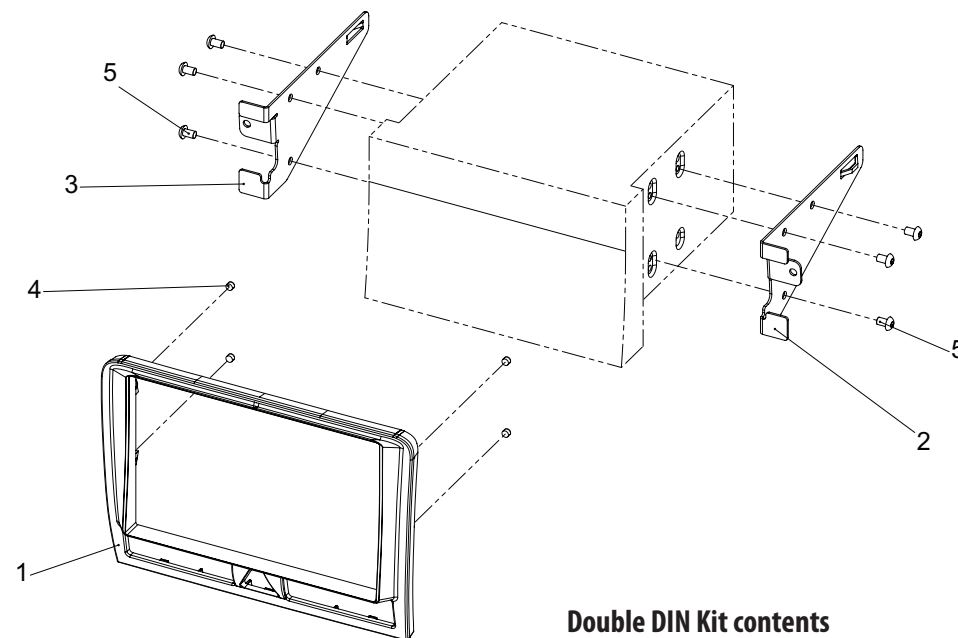

Double DIN Kit contents

- (1) Facia Plate
- (2) Mounting Bracket Right
- (3) Mounting Bracket Left
- (4) Magnet
- (5) Flat Headed Screw



1. Put four radio release keys in the appropriate slots of the OEM radio




2. Remove OEM head unit by pulling it towards your direction



3. Remove plastic clip surrounding cup holder and hazard light switch

4. Attach metal mounting brackets to with 3 flat headed screws on each side to Alpine INE-W928R

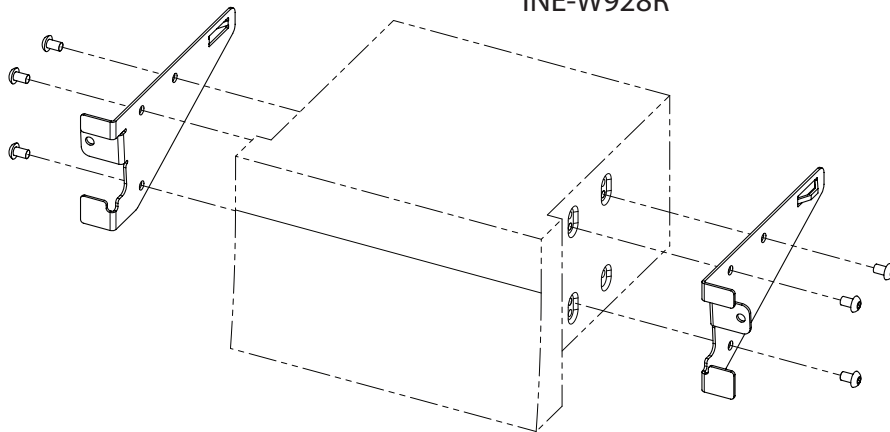

5. Remove OEM Torx screws (see arrows)
Cut away plastic (see white lines) to clear space for INE-W928R

